



AC L2061-B

UV-Curable, High Refractive Index Optical Resin

PRODUCT DESCRIPTION:

- Base chemistry: acrylate, radical polymerization
- One component resin ready for use, solvent-free, UV curing

PRODUCT USE:


- Nano imprinting
- Lens making
- Lens and prism bonding

FEATURES:

- High Tg, high refractive index, good flow properties, high heat stability and high hardness


UV-VIS and NIR spectra:

L2061-B 125 micron free-standing film

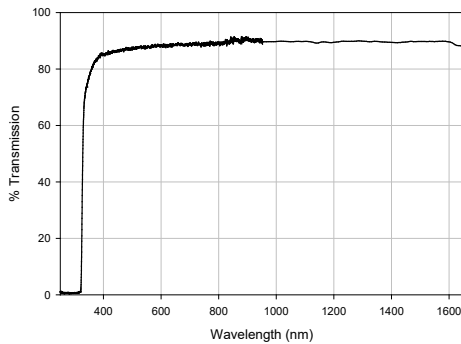

Refractive index vs. temperature

L2061-B RI vs 1000/T

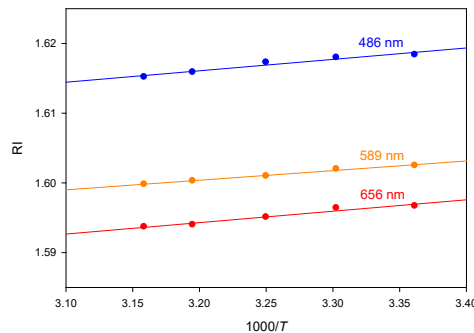

Calculated Refractive Index (R.I) L2061-B

wavelength (nm)	function (T is temperature in °C)
589	R.I. = 1.5562 + 13.81/(273+T)
486	R.I. = 1.5636 + 16.40/(273+T)
656	R.I. = 1.5419 + 16.38/(273+T)

Updated 04-2021

UV CURING CONDITIONS: L2061-B is required to cure in nitrogen or in the absence of air.

- *Metal halide/Mercury UV: UV-A (320-400 nm), intensity: 50-1,000 mW/cm²
- *or LED-365 nm, UV light intensity: 100 to 1,000 mW/cm²

LED-365 nm		Metal Halide/Mercury(UV-A: 320-400 nm)	
UV intensity(mW/cm ²)	time (sec)	UV intensity(mW/cm ²)	time (sec)
100	20 sec or more	50	40 sec or more
or 200	10 sec or more	or 100	20 sec or more
or 300	7 sec or more	or 200	10 sec or more
or 400	5 sec or more	or 500	5 sec or more
or 500	4 sec or more	or 1,000	2 sec or more
or 1,000	2 sec or more		

TYPICAL PROPERTIES

Uncured resin

Viscosity at 25 °C, mPa.s or cps	1,800 to 2,200
Density (g/mL)	1.1
Shelf life (20 - 30°C):	6 months
Pot life or working life (20 - 30°C):	3 months

Cured film

Appearance of cured adhesive	optically clear
Shrinkage (volume %)	4
Hardness – Shore D	95
Glass transition temperature (DMA, °C)	130

Refractive index of cured film (25 °C)

@ 589 nm (D)	1.602
@ 486 nm	1.618
@ 656 nm	1.597

Abbe Number at 25 °C (V_D)

27

Depth of cure

>5 mm

Coefficient of thermal expansion (DMA)

below Tg (x10 ⁻⁶), °C ⁻¹	35
above Tg (x10 ⁻⁶), °C ⁻¹	175

Physical properties tested at 25°C, 50% RH (ASTM D638)

Elongation (%)	18
Young's Modulus, psi	200,000

Operating temperature, °C

-40 to 140

GENERAL USAGE INFORMATION:

Shipment: no restriction on shipment

Storage: After receipt in black syringes or amber HDPE bottles, room temperature storage (15-30°C) in the original container is required.

SAFETY AND HANDLING

The uncured adhesive can be cleaned with isopropyl alcohol (IPA), methyl ethyl ketone (MEK), acetone, or xylene. Avoid direct skin and eye contact. Use only in well ventilated areas. Use protective clothing, **gloves and safety goggles**. Read [Safety Data Sheet](#) before handling.

The information presented here represents our best available information and is believed to be reliable, but it and does not constitute any guarantee or warranty. Inasmuch as Addison Clear Wave has no control over the exact manner in which others may use this information, it does not guarantee the results to be obtained. Nor does the company make any expressed or implied warranty of merchantability, or fitness for a particular purpose concerning the effects or results of such use. Purchasers are further responsible for determining the suitability of the product for its intended use and the appropriate manner of utilizing the production processes and applications so as to ensure safety, quality and effectiveness. Addison Clear Wave makes no warranties and assumes no liability in connection with the use or inability to use this product. V11-042021